



TECHNICAL DATA / FEATURES

dimensions: 100x100x91
 light functions: fog light
 function markings: B
 reference mark: -
 source of light: H3
 maximum power: 70W
 nominal voltage: 12V-24V DC
 optics: standard
 IP rating: IP66, IP69K
 housing's material: plastic
 housing's colour: black
 lens' material: glass
 lens' colour: clear
 mounting: M8, omega
 built-in connectors: AMP Faston 250
 other (optional): shock absorber



ADDITIONAL INFORMATION




Mounting: factory prepared places, built-in to vehicle's recess, as a freestanding on the body work. They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors on wire (on request).

Useful parts while installing:

AMP Faston 250 plug 2-pin - cat. No. A.07138
 AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
 deutsch plug DT06-2S 2-pin - cat. No. A.07135

DIMENSIONS

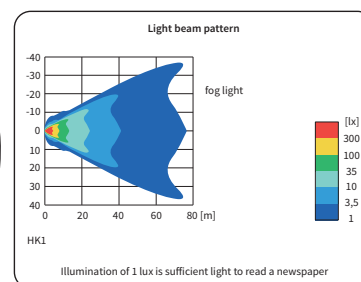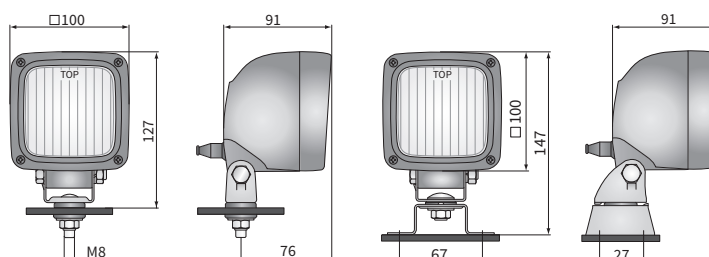

Cat. number	Hella Catal. No.	Homologation code	IP rating	IP66	IP69K	Accessories	bulb H3 12V	bulb H3 24V	shock absorber	hermetic grommet	Bracket	M8	omega	Side	right	left	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin	Packaging / pc	carton box
HK1.42300		052		✓	✓							✓			✓	✓		✓			2		1
HK1.42301		052		✓	✓		✓					✓			✓	✓		✓			2		1
HK1.42304	2ZR 997 506-391	052		✓	✓			✓				✓			✓	✓		✓			2		1
HK1.42302		052		✓	✓								✓		✓	✓		✓			2		1
HK1.42303		052		✓	✓		✓						✓		✓	✓		✓			2		1
HK1.42320		052		✓	✓				✓				✓		✓	✓		✓			2		1
HK1.42321		052		✓	✓		✓		✓				✓		✓	✓		✓			2		1
HK1.42322		052		✓	✓			✓					✓		✓	✓		✓			2		1
HK1.42310		052		✓					✓	✓			✓		✓	✓							1